


# Threaded Bolt Spring Plungers

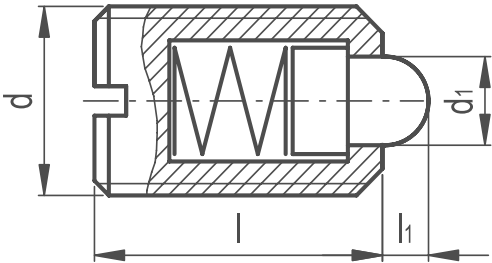

**THREADED BODY**

/ AISI 303 stainless steel, screwdriver slotted head.

**BOLT AND SPRING**

/ Nitrided AISI 303 stainless steel bolt, stainless steel spring with normal end-force.

**FEATURES AND APPLICATIONS**

AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these plungers on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.



Part Reference	d	d $\pm$ -0.1	l $\pm$ -0.1	l1	Initial	Max
SPP1SS-3215	M4	1.8	9	1.5	4.5	12.5
SPP2SS-3215	M5	2.4	12	2	5	13
SPP3SS-3215	M6	2.7	14	2	6	17
SPP4SS-3215	M8	3.8	16	2	16	33
SPP5SS-3215	M10	4.5	19	2.5	19	42
SPP6SS-3215	M12	6	22	3.5	22	57
SPP7SS-3215	M16	8.5	24	4.5	38	78
SPP8SS-3215	M20	10	30	6.5	39	81
SPP9SS-3215	M24	13	34	8	72	155