


Threaded Plug O-Ring

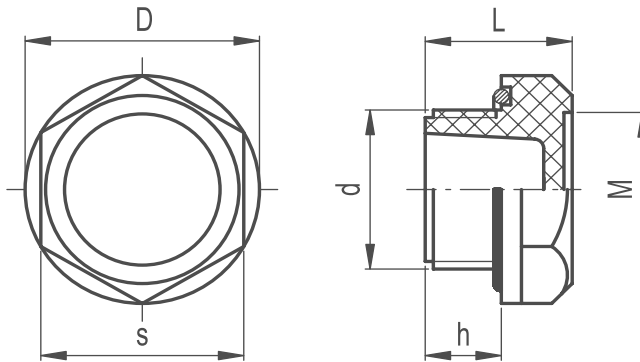

/ Material

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

/ Colour

Black, matt finish.

/ Packing ring

NBR synthetic rubber O-Ring.

/ Maximum continuous working temperature
130°C.

ACCESSORIES ON REQUEST

Plugs are suitable for mounting MH. aluminium plates with graphic symbols here beside.

TECHNICAL DATA

An adequate tightening torque (see table below) is recommended when screwing the plug, so as to guarantee optimal tightness without any deformation of the packing ring. Suggested tightening torque is the result of laboratory tests carried out at ambient temperature (23°C) with plug, packing ring and reservoir walls perfectly cleaned.



| Part Reference | d | h | D | s | L | M | Tightening Torque (Nm) |
|----------------|-------|----|----|----|----|------|------------------------|
| TPOR1 | G 1/2 | 11 | 32 | 27 | 20 | 20.5 | 8-10 |
| TPOR2 | G 3/4 | 12 | 37 | 32 | 22 | 25 | 10-12 |
| TPOR3 | G 1 | 13 | 44 | 38 | 23 | 31 | 12-15 |