


Aluminium Threaded Plug



- / **Material**
Aluminium, sandblasted matt finish.
- / **Flat packing ring**
NBR synthetic rubber.
- / **Maximum continuous working temperature**
120°C.

FEATURES
Plugs are provided with a threaded blind hole for assembling a dipstick. High temperature up to 200°C. Available on request.

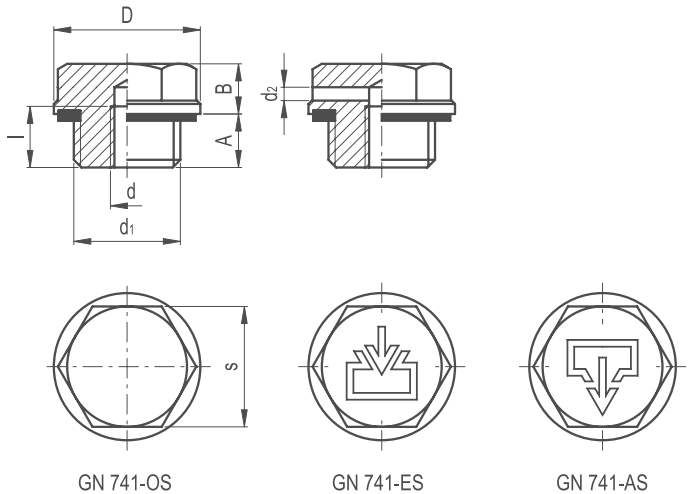

| Part Reference | d1 | A | B | D | d | l | s |
|----------------|---------|-----|-----|----|----|---|----|
| ATP1 | M16x1.5 | 8 | 7.5 | 22 | M5 | 8 | 18 |
| ATP2 | M20x1.5 | 8.5 | 7.5 | 26 | M5 | 8 | 21 |
| ATP3 | M26x1.5 | 9 | 8 | 32 | M5 | 8 | 27 |
| ATP4 | G 3/8 | 8 | 7.5 | 22 | M5 | 8 | 18 |
| ATP5 | G 1/2 | 8.5 | 7.5 | 26 | M5 | 8 | 21 |
| ATP6 | G 3/4 | 9 | 8 | 32 | M5 | 8 | 27 |
| ATP7 | G 1 | 11 | 8.5 | 40 | M5 | 8 | 32 |