


Dowel Pins Plain and Tapped – Imperial

Plain BS 1804 Limits

A range of A.N.S.I Dowel Pins can be supplied

1/16" and 3/32"
unhardened
1/8 - 1" Steel
hardened

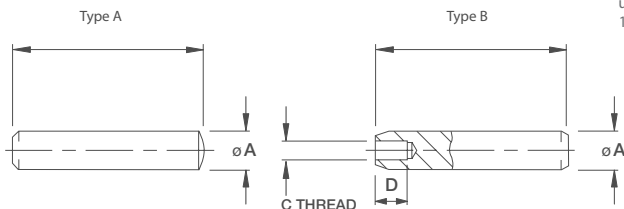

- / 1/16" and 3/32" dia Pins can be supplied hardened specially.
- / Diam's 1/16" - 3/32" - 1/8" will be chamfered each end.

T = Tapped range

Diameter 'A'	1/16"	3/32"	1/8"	5/32"	3/16"	7/32"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"
'C' thread							4 B.A.	3 B.A.	2 B.A.	1 1/4" B.S.F.	1 1/4" B.S.F.	1 1/4" B.S.F.	
'D'							1/4"	1/4"	5/16"	3/8"	3/8"	3/8"	
B' Length	1/4"												
	5/16"												
	3/8"												
	7/16"												
	1/2"						T	T	T				
	9/16"												
	5/8"						T	T	T				
	3/4"						T	T	T	T			
	7/8"						T	T	T	T			
	1"						T	T	T	T	T		
	1 1/8"						T	T	T	T	T		
	1 1/4"						T	T	T	T	T		
	1 3/8"						T	T	T	T	T		
	1 1/2"						T	T	T	T	T	T	
	1 5/8"						T	T	T	T	T		
	1 3/4"						T	T	T	T	T	T	
	1 7/8"						T	T	T	T	T		
	2"						T	T	T	T	T	T	
	2 1/8"						T	T	T	T	T	T	
	2 1/4"						T	T	T	T	T	T	
	2 3/8"						T	T	T	T	T	T	
	2 1/2"						T	T	T	T	T	T	
	2 5/8"							T	T	T	T		
	2 3/4"						T	T	T	T	T	T	
	2 7/8"							T	T	T	T	T	
	3"						T	T	T	T	T	T	
	3 1/8"							T	T	T			
	3 1/4"							T	T	T	T	T	
	3 1/2"							T	T	T	T	T	
	3 3/4"								T	T	T	T	
	4"								T	T	T	T	
	4 1/4"										T	T	
	4 1/2"										T	T	
	5"										T	T	
	5 1/4"											T	
	5 1/2"											T	
	6"											T	

**HUGE
STOCKS**

**VOLUME
DISCOUNT**

/ Intermediate lengths can be supplied to order.

/ Tapped Dowel Pin Extractors available - state thread size. Dowel Pins can be supplied with air release flat at extra cost.