
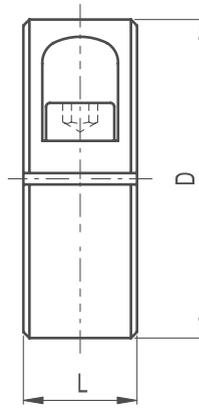


# Split Clamping Collar Stainless Steel

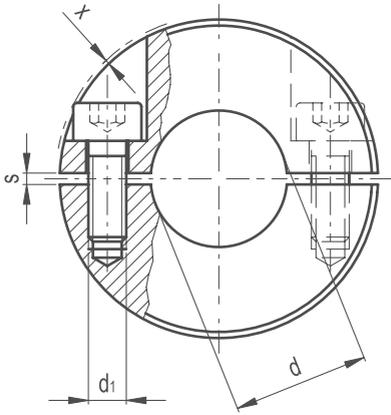

## / Material

AISI 303 stainless steel, sandblasted matte finish.

## / Clamping assembly system

AISI 303 stainless steel grub screws, cylindrical head with hexagon socket, supplied assembled.  
For diameters D = from 20 to 36 threaded through holes; D > 42 threaded blind holes.

## FEATURES AND APPLICATIONS

Split set collars can be used not only as end stops, but they can also be used for fixing other components, such as end limit switches. Split set collars can also be assembled on shafts whose shape may not allow their sliding. AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these split set collars on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.



| Part Reference | D  | dH8 | L  | d1 | s   | x   |
|----------------|----|-----|----|----|-----|-----|
| SCC1SS         | 20 | 6   | 9  | M3 | 1.2 | 0.3 |
| SCC2SS         | 22 | 8   | 9  | M3 | 1.2 | 0.2 |
| SCC3SS         | 26 | 10  | 11 | M4 | 1.5 | 1   |
| SCC4SS         | 30 | 12  | 11 | M4 | 1.5 | 0.2 |
| SCC5SS         | 32 | 14  | 11 | M4 | 1.5 | 0.2 |
| SCC6SS         | 36 | 15  | 13 | M5 | 1.5 | 1   |
| SCC7SS         | 36 | 16  | 13 | M5 | 1.5 | 1   |
| SCC8SS         | 42 | 18  | 15 | M5 | 1.5 | 0.2 |
| SCC9SS         | 42 | 20  | 15 | M5 | 1.5 | 0.2 |
| SCC10SS        | 48 | 22  | 15 | M5 | 1.5 | 0   |
| SCC11SS        | 48 | 25  | 15 | M5 | 1.5 | 0   |
| SCC12SS        | 55 | 28  | 15 | M6 | 1.5 | 0   |
| SCC13SS        | 55 | 30  | 15 | M6 | 1.5 | 0   |
| SCC14SS        | 60 | 32  | 15 | M6 | 2   | 0   |
| SCC15SS        | 60 | 35  | 15 | M6 | 2   | 0   |
| SCC16SS        | 65 | 40  | 15 | M6 | 2   | 0.2 |