


Threaded Plungers with Screwdriver Slotted Head

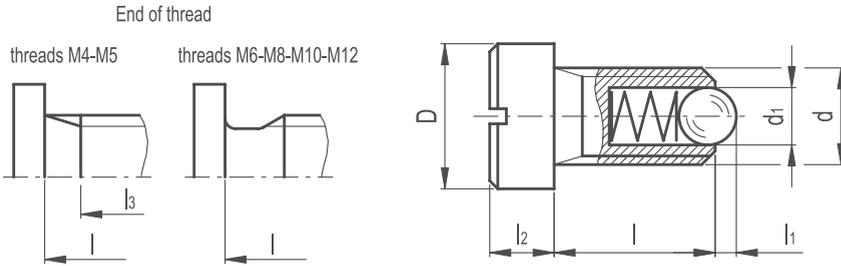

/ Body

AISI 303 stainless steel, screwdriver slotted head.

/ Ball and spring

Hardened stainless steel ball, stainless steel spring.

FEATURES AND APPLICATIONS

The screwdriver slot on the head of the plunger is also useful to provide an indication of the position of the blocked element. AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these threaded plungers on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.

/ Body

Black-oxide steel, screwdriver slotted head.

/ Ball and spring

Hardened steel ball, steel spring.

FEATURES

The screwdriver slot on the head of the plunger is also useful to provide an indication of the position of the blocked element.



Spring Plunger Headed With Ball

Part Reference	d	d1	D	l	l1	l2	l3	Initial	Max
SPHB1	M4	2.5	6	6.5	0.8	3	5	8	14
SPHB2	M5	3	8	8.5	0.9	4	6.7	8	14
SPHB3	M6	3.5	10	9	1	5	-	11	18
SPHB4	M8	4.5	13	11	1.5	5.5	-	18	31
SPHB5	M10	6	16	14	2	6	-	24	45
SPHB6	M12	8	18	15	2.5	7	-	26	49

Spring Plunger Headed With Ball - Stainless Steel

Part Reference	d	d1	D	l	l1	l2	l3	Initial	Max
SPHB1SS	M4	2.5	6	6.5	0.8	3	5	8	14
SPHB2SS	M5	3	8	8.5	0.9	4	6.7	8	14
SPHB3SS	M6	3.5	10	9	1	5	-	11	18
SPHB4SS	M8	4.5	13	11	1.5	5.5	-	18	31
SPHB5SS	M10	6	16	14	2	6	-	24	45
SPHB6SS	M12	8	18	15	2.5	7	-	26	49