


# Threaded Bolt Spring Plungers

305

POSITIONING & MACHINE ELEMENTS

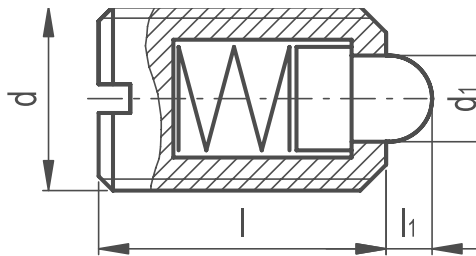

## THREADED BODY

/ Black-oxide steel, screwdriver slotted head.

## BOLT AND SPRING

/ Execution B: hardened steel bolt, black-oxide steel spring with normal end-force.

/ BS: zinc-plated steel bolt, black-oxide steel spring with heavy end-force.

Special executions on request.



Part Reference	d	d $\pm$ 0.1	l $\pm$ 0.1	l1	Initial	Max
SPP1-3215	M4	1.8	9	1.5	4.5	12.5
SPP2-3215	M5	2.4	12	2	5	13
SPP3-3215	M6	2.7	14	2	6	17
SPP4-3215	M8	3.8	16	2	16	33
SPP5-3215	M10	4.5	19	2.5	19	42
SPP6-3215	M12	6	22	3.5	22	57
SPP7-3215	M16	8.5	24	4.5	38	78
SPP8-3215	M20	10	30	6.5	39	81
SPP9-3215	M24	13	34	8	72	155