


Threaded Ball Spring Plungers



- / **Threaded body**
Black-oxide steel, hexagon socket head.
- / **Ball and spring**
Hardened steel ball, steel spring with normal end-force.

- / **Threaded body**
AISI 303 stainless steel, hexagon socket head.
- / **Ball and spring**
Hardened stainless steel ball, stainless steel spring with normal end-force.

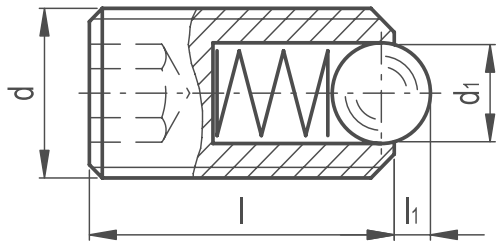

Spring Plunger with Ball and Hex

Part Reference	d	d1	l+-0.1	l1	Initial	Max
SPBH1	M4	2.5	12	0.8	8.5	14
SPBH2	M5	3	14	0.9	8	14
SPBH3	M6	3.5	15	1	11	18
SPBH4	M8	4.5	18	1.5	18	31
SPBH5	M10	6	23	2	24	45
SPBH6	M12	8	26	2.5	26	49
SPBH7	M16	10	33	3.5	41	86
SPBH8	M20	12	43	4.5	66	111
SPBH9	M24	15	48	5.5	81	151

Spring Plunger Stainless Steel with Ball and Hex

Part Reference	d	d1	l+-0.1	l1	Initial	Max
SPBH1SS	M4	2.5	12	0.8	8.5	14
SPBH2SS	M5	3	14	0.9	8	14
SPBH3SS	M6	3.5	15	1	11	18
SPBH4SS	M8	4.5	18	1.5	18	31
SPBH5SS	M10	6	23	2	24	45
SPBH6SS	M12	8	26	2.5	26	49
SPBH7SS	M16	10	33	3.5	41	86
SPBH8SS	M20	12	43	4.5	66	111
SPBH9SS	M24	15	48	5.5	81	15